

OPTIONAL: INSTALL V-GROOVE AT EDGE
& INSTALL ELASTOMERIC SEALANT IF LESS THAN 1"
IF METAL IS EXPOSED—NO V GROOVE IS NEEDED

PROPERLY PREPARE METAL FLANGE
BEFORE APPLYING NEW FOAM TO
ENHANCE ADHESION FACIA
IF EXISTING SHEET METAL FLASHING
REMAINS MAKE SURE IT WILL LAST
LIFE OF NEW ROOF

HEIGHT VARIES
DEPENDING ON
FOAM THICKNESS

NEW ELASTOMERIC COATING
W/ NEW ADDITIONAL COATING
● 12" PERIMETER


NEW ELASTOMERIC COATING

SPF INSULATION

WOOD NAILERS
W/ FASTENERS 3" O.C.

CONTINUOUS CLEAT

NEW OR EXISTING ROOF DECK

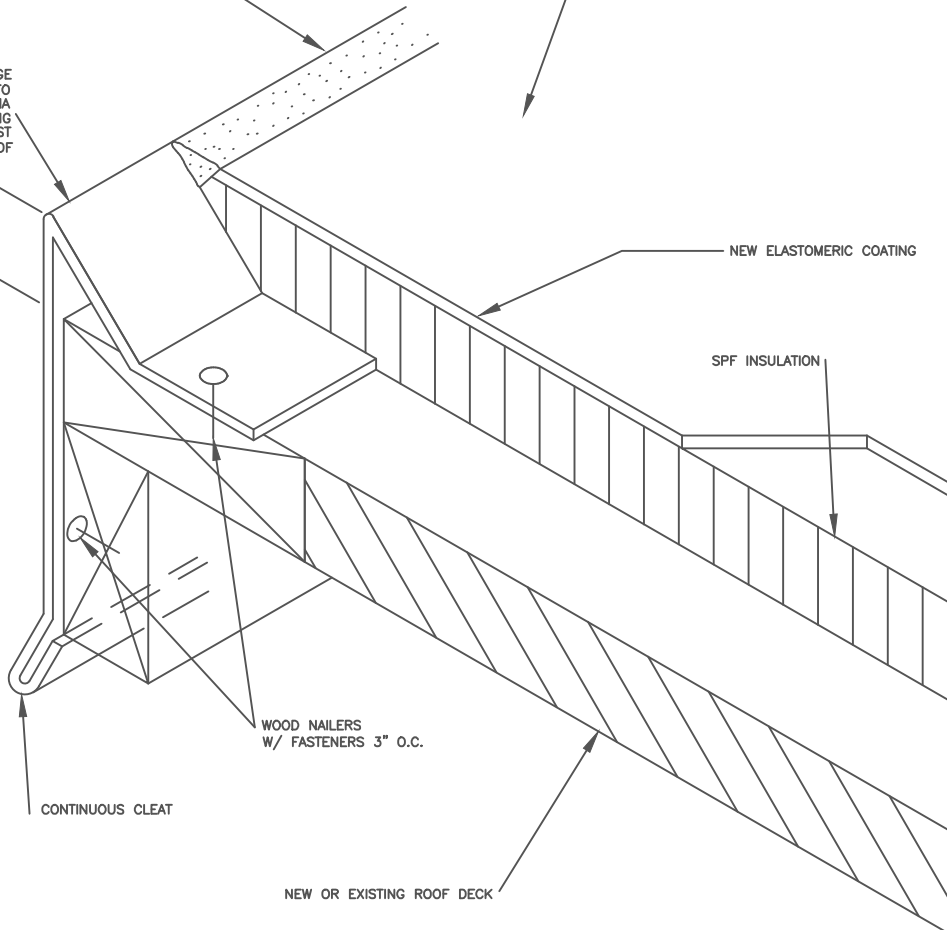

Roof Edge – Gravel Stop



Bayer MaterialScience LLC
Spray Insulation & Roofing Materials
Polyurethanes

2400 Spring Stuebner Road West
Spring, TX 77389

Phone: 281 350-9000

Fax: A: 281 288-6450

B: 281 288-3348

Other: 800 221-3626

www.baysystemsspray.com